


GRC 59-25MR EPOXY EMULSION

MAIN ADVANTAGES

- Exceptional Bond Strength
- Zero VOC
- Very Low Viscosity - Great Penetration
- Flash Point > 200°F
- Very Stable Tank Life
- Water Reducible - No Co-Solvents
- UL Listed for Hermetic Applications

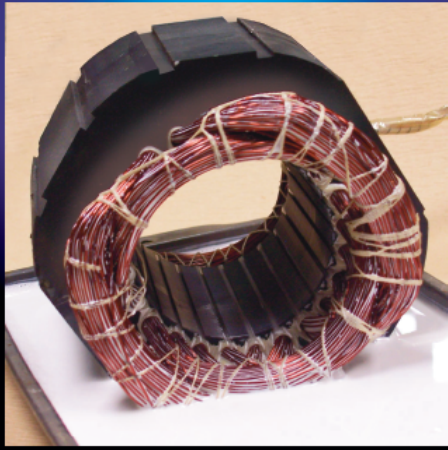

—FEATURED PRODUCT—

ELANTAS PDG, Inc. is proud to feature this water-emulsified epoxy resin as it represents a true breakthrough in resin technology. In the past, many water-based resins failed to meet their promised potential while being eco-friendly. Most of these resins require adjustments to keep the pH at an acceptable level. GRC 59-25MR Epoxy Emulsion is the exception!

GRC 59-25MR Epoxy Emulsion is currently used in the hermetic industry by major original equipment manufacturers. They use it because of the exceptional bond strength and its tough, thin chemically-resistant film.

The environment loves it because it has **no VOC's**, which cause pollution. Insurance companies and fire departments love it because of the **high flash point**. Your employees will love it because there are **no noxious odors**. You'll love it because there are **no tank adjustments** needed, its thin film requires **little to no cleanup**, and it has **almost no run off** in the oven.

We love it because the **stability** allows us to do tank samples about once a year. Gentle agitation or recirculation is all that is required to keep this resin in suspension.

Environmentally Friendly, With No VOCs

Helical Coil Bond vs. Temperature

