




P.O. BOX 27466  
TUCSON, AZ 85726-7466  
TEL: 800-832-3882  
FAX: 520-790-3530  
www.QRPGloves.com

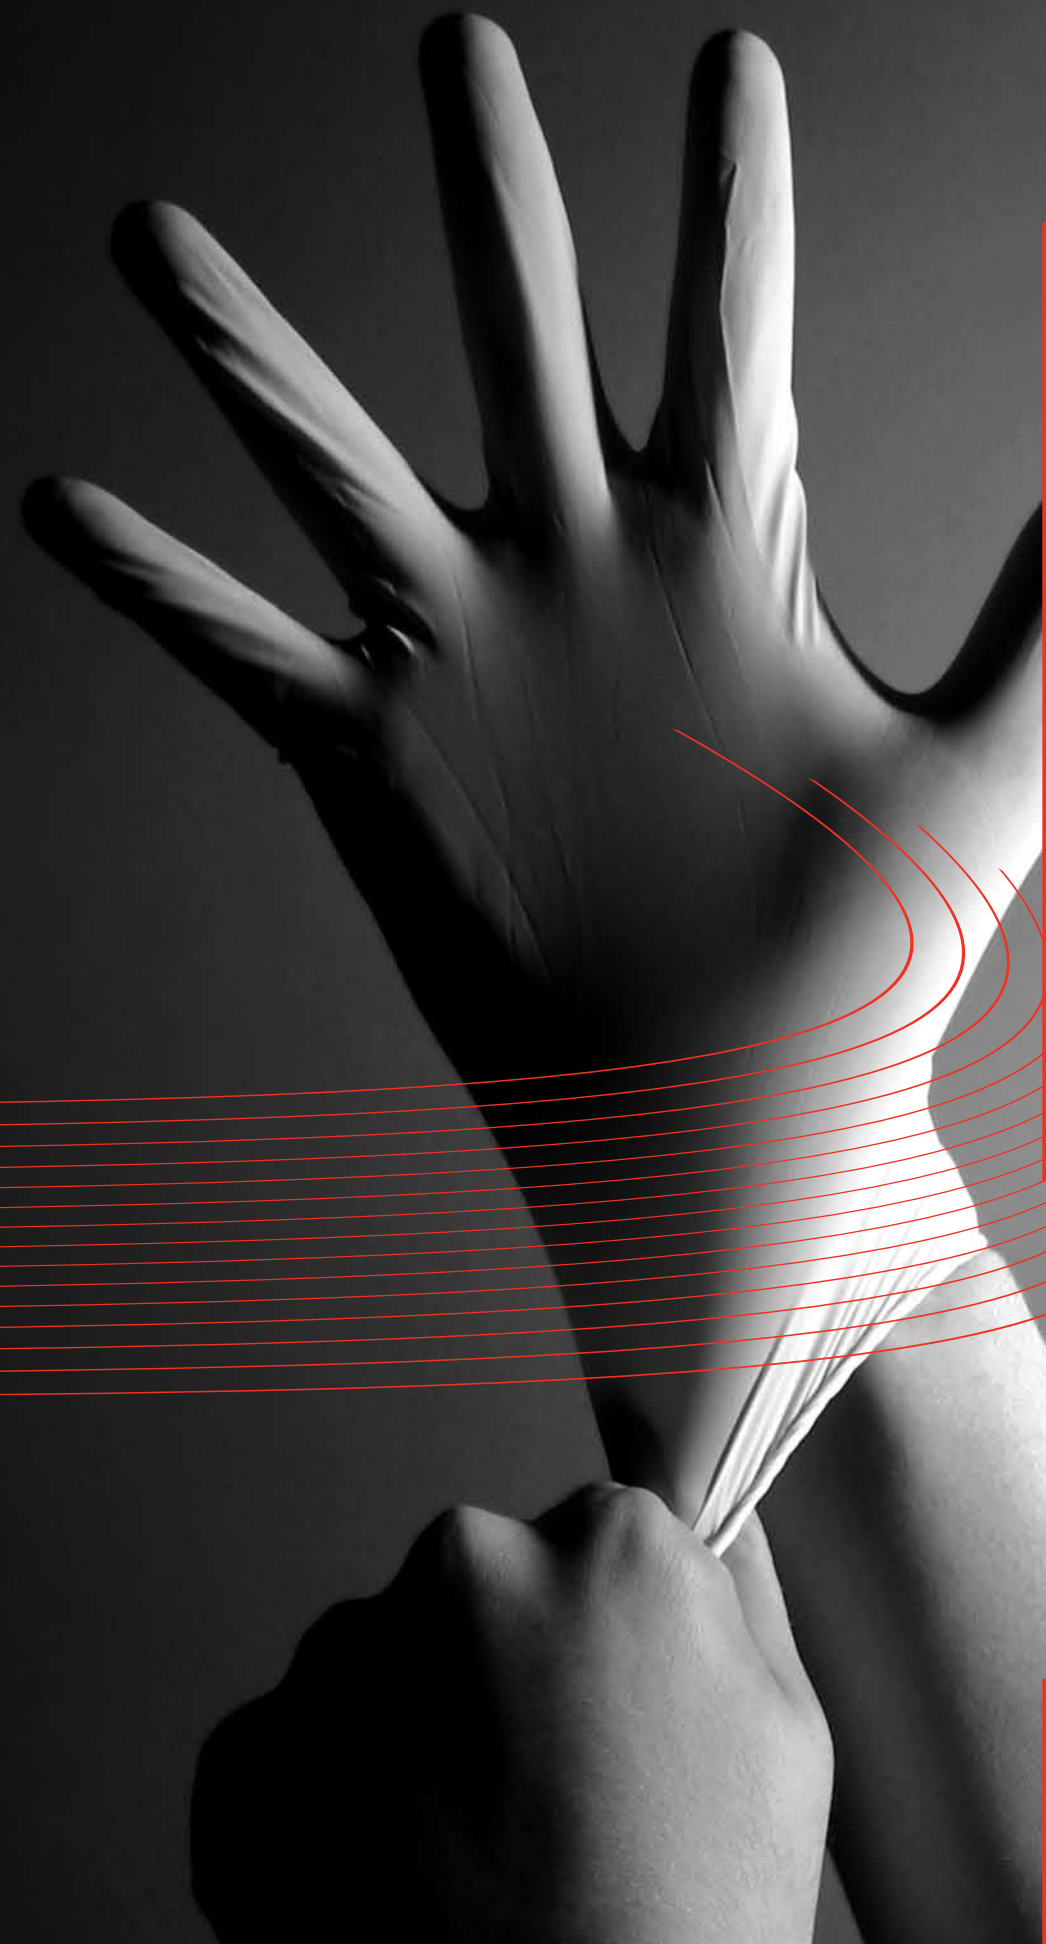

PROTECTING  
PEOPLE,  
PRODUCTS &  
PROCESSES  
WORLDWIDE<sup>SM</sup>

QRP has compiled the information contained herein from what we believe are authoritative sources and believe are accurate and factual as of the date printed. It is offered solely as a convenience to our customers and is intended only as a guide concerning the products mentioned. Since the users specific use applications and conditions of use are beyond QRP's control, QRP makes no warranty or representation regarding the results which may be obtained by the user. User assumes all risks and is solely responsible for the suitability and fitness of the product selected for a particular application. User should consider the benefits of double gloving in uncertain situations. In the interests of product improvement, specifications are subject to change without notice.

**Quality you expect.  
Reliability you can count on.  
Performance you require.**



Founded in 1974, QRP, Incorporated is recognized worldwide as a leading producer and innovator of gloves and fingercots in a wide variety of applications. The Company emphasizes products for critical environments, including cleanrooms and ESD control. QRP has developed unique products for protection of employees against thermal extremes and against a wide array of chemicals. In addition to these highly specialized gloves and fingercots, QRP offers products for controlled environments and general use. All QRP products are engineered to the highest standards to increase process yields across a broad range of end uses.

[www.QRPGloves.com](http://www.QRPGloves.com)

*QRP adheres to all recommended requirements in the manufacturing of our gloves and fingercots:*

Governmental  
FED-STD-209E  
Fed Test Method 101C  
Fed Test Method 191  
Fed Spec A-A-50855A  
Fed Spec A-A-53134A  
Cal OSHA Title 8, Art. 10.1

Military  
MIL-HDBK-263B  
MIL-G-82242C  
MIL-STD-168B  
MIL-STD-1246C

Nongovernmental  
ANSI/ASQC-Z1.4  
ASTM-D130  
ASTM-D257  
ASTM-D412  
ASTM-D573  
ASTM-D882  
ASTM-D991  
ASTM-D1353  
ASTM-D2420  
ASTM-D3577  
ASTM-D3578  
ASTM-D3572  
ASTM-E595  
ASTM-F311  
ASTM-F312  
ASTM-F739  
US Pharmacopoeia Nat.  
Formulary XX and XXI



**general purpose**

**APPLICATIONS**

GENERAL PURPOSE	3-6
CLEANROOM	7-10
KNIT	11-13
ESD & CHEMICAL INFO	14-15





**Biotek®  
Premium Latex Glove**

- Lightly powdered or powder-free for wearer comfort.
- Textured for enhanced wet/dry grip.
- USDA compliant for food handling and processing.
- Non-slip beaded cuff for easy donning; resists rolldown.
- Safety — exceeds ASTM D-3578.

609BP (Low Powder)  
609BPF (Powder-Free)  
Size: S-XXL 9" Length, Ambi



**Qualatex® Miracle Grip  
Polymer Coated Latex Glove**

- Double polymer coated.
- 6 mil powder-free latex.
- Textured fingers and palm for enhanced wet/dry grip.
- Non-slip beaded cuff.
- Non-sterile.

MG09  
Size: XS-XL 9" Length, Ambi



**Qualatex® Miracle Grip HP  
High Performance Latex Glove**

- Tough 13 mil thickness & 12" length for added protection
- More Cut/Puncture Resistant than normal 6 mil gloves.
- Textured fingers & palm.
- Non-slip beaded cuff.
- Strong & flexible.
- Maximum comfort.
- Distinctive blue color.

MGHR  
Size: XS-XL 12" Length, Ambi



**Qualatex® Indy  
Latex Glove**

- Unique fit and feel.
- Wide range chemical protection.
- Beaded cuff.
- Geared for industrial, automotive and food service.
- Economical.
- Natural color.

609BYF (Powder-Free)  
Size: S-XL 9" Length, Ambi



**QualaSheer® Indy  
Vinyl Glove**

- Beaded cuff.
- Geared for industrial, automotive and food service.
- Economical.
- Clear color.

VCYF09 (Powder-Free)  
Size: S-XL 9" Length, Ambi



**Qualatrilite® Indy  
Nitrile Glove**

- 3X puncture resistance of vinyl or natural rubber latex gloves.
- Tough industrial grade.
- Economical protection from chemicals and petroleum.
- USDA compliant for food handling and processing.
- Distinctive blue color.

BQY09 (Powder-Free)  
Size: S-XL 9" Length, Ambi



**Qualatrilite® Blue 5 mil  
Premium Nitrile Glove**

- 3X puncture resistance of vinyl or natural rubber latex gloves.
- Naturally Anti-static, surface resistance 10<sup>9</sup> ohms.
- Geogrip 360sm fully textured fingers and palms.
- Meets ASTM D6319.

BQP09 (9" Blue, 5 mil, Low Powder)  
BQF09 (9" Blue, 5 mil, Powder-Free)  
BQF12 (12" Blue, 5 mil, Powder-Free)  
Size: XS-XXL, Ambi



**Qualatrilite® Blue 8 mil  
Extra Thick Nitrile Glove**

- Rugged 8 mil thickness.
- 3X puncture resistance of vinyl or natural rubber latex gloves.
- Naturally Anti-static, surface resistance 10<sup>9</sup> ohms.
- Geogrip 360sm fully textured fingers and palms.
- Meets ASTM D6319.

8BQP09 (9" Blue, 8 mil, Low Powder)  
8BQF09 (9" Blue, 8 mil, Powder-Free)  
Size: XS-XXL, Ambi



**QualatriliteSENS!  
Soft Nitrile Glove**

- Latex-free, powder-free.
- Exceptional tactile sensitivity with the toughness, durability and chemical resistance of nitrile.
- Uniquely conforms to the wearer's hand.
- Textured fingertips, for reliable, safe, secure wet/dry grip.

SQWF09 (White)  
SQBF09 (Blue)  
SQWB09 (White Bagged)  
Size: S-XL 9" Length, Ambi



**Qualatrilite® greenTUFF  
Heavy Duty Nitrile Glove**

- Excellent abrasion and puncture resistance.
- Tough industrial grade.
- Thick nitrile coating and 13" length for excellent protection against a wide range of chemicals including strong detergents, oils, greases, fats and most solvents.

15GQNF13 (15 mil Flocked)  
Size: S-XXL 13" Length, Hand Specific



**Qualatex®**  
**Latex Fingercots**

- For general, personal and product protection.
- Sheer film for maximum dexterity.
- Economical.
- For industrial use only!

2C (Low Powder, Textured, Natural Color)

5J (Powder-Free, Natural Color)

7J (Powder-Free, Pink, Anti-static)

8J (Powder-Free, Black, Static Dissipative)

Size: S-XL

**Qualatril®**  
**Nitrile Fingercot**

- Excellent tactile sensitivity.
- Washed.
- Anti-static.
- Skin thin.
- Economical.
- For industrial use only!

9J (Powder-Free)


Size: S-XL



**Blü Food**  
**Latex Fingercot**

- 100% natural latex, USDA compliant blue coloring.
- For food & poultry handling.
- Meets US Government 21-CFR specifications.
- Skin thin.

**BF (Powder-Free)**  
Size: S-XL

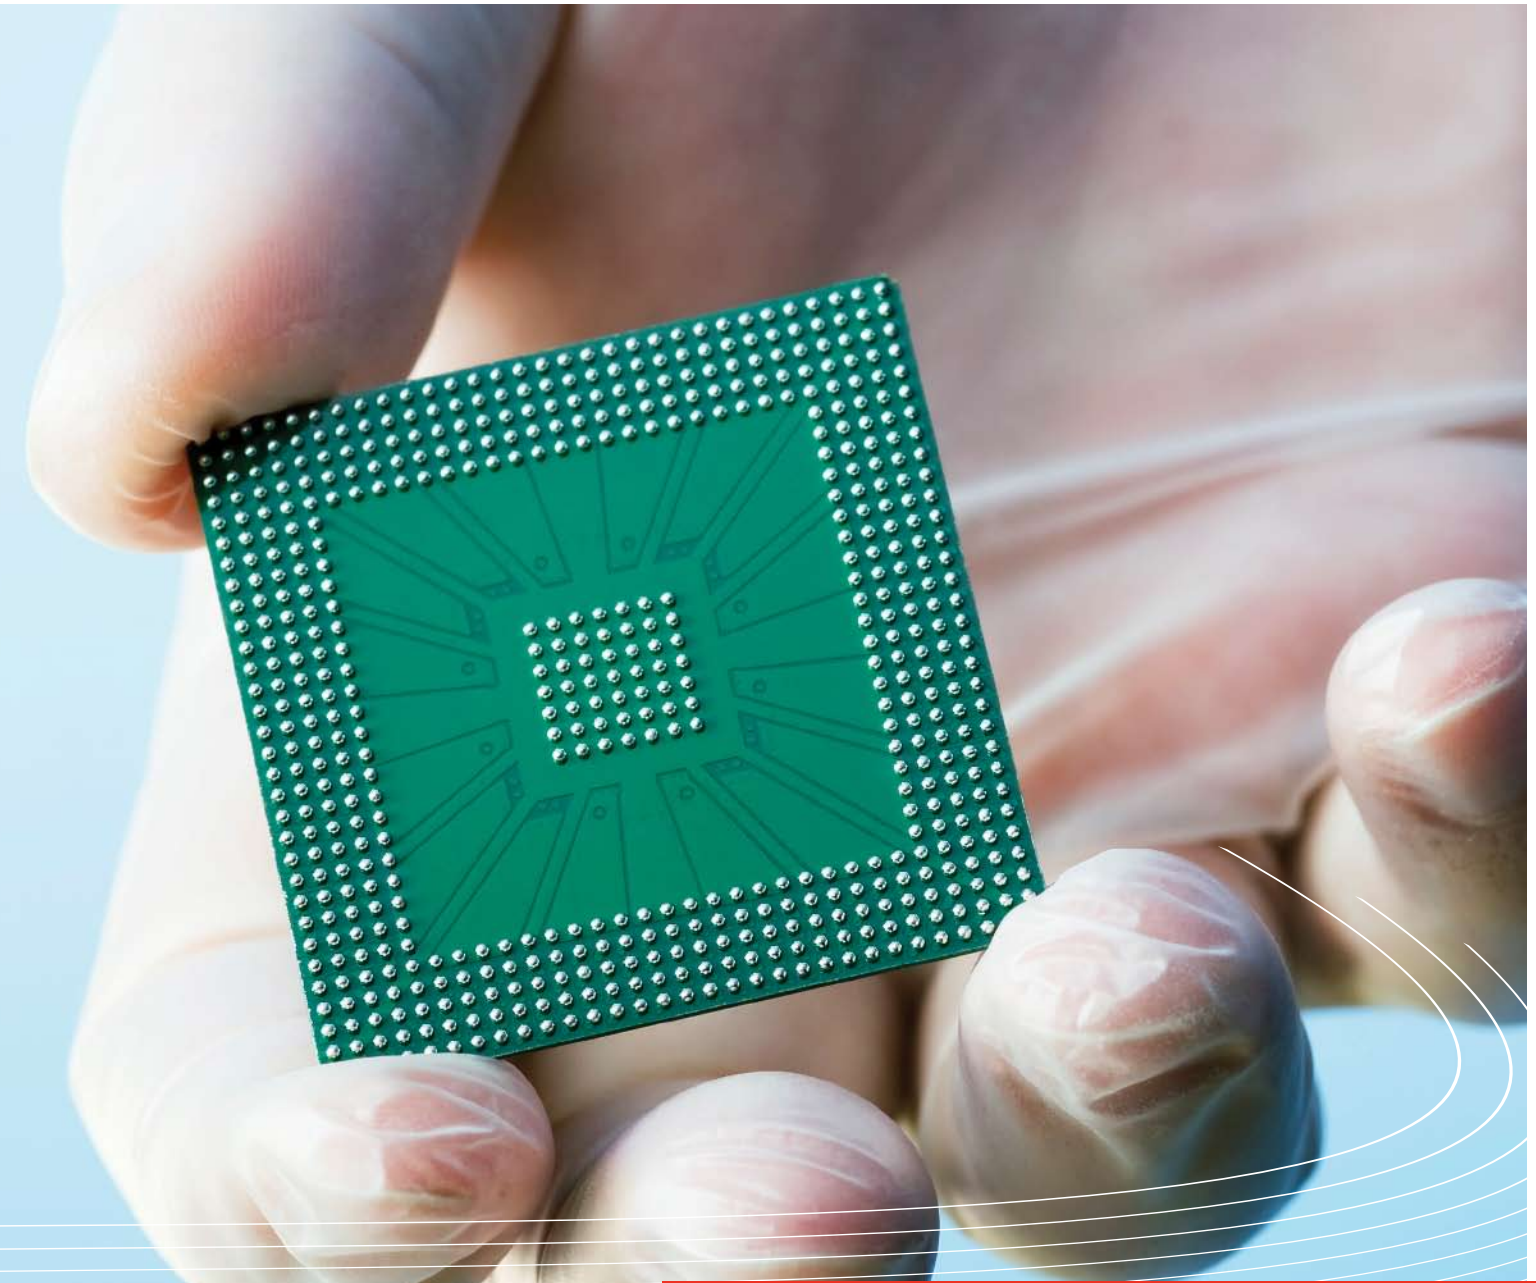

cleanroom

APPLICATIONS

QRP adheres to all requirements of IEST-RP-CC005.2, Recommended Practice for Gloves and Fingercots Used in Cleanrooms and Other Controlled Environments.



We employ today's most advanced manufacturing practices. Our P3 Polar Process is today's most advanced halogenation and processing system, ensuring uniformity across our gloves and fingercots, with ultra-low extractables, non-volatile residues and particulates. Using only the finest materials paired with proprietary formulations, processing and packaging, QRP delivers the highest and most consistent levels of quality, reliability and performance.

Qualatril®.XC

Qualatex®.XC

Qualatex® HiPro .XC.

QualaSheer®.XC  
VINYL GLOVES

PolyTuff®  
PERFORMANCE GLOVES

Qualatherm®  
THERMAL PROTECTION



**Qualatex® HiPro XC**  
**Class 100 Latex Glove**

- Premium natural rubber latex gloves for ISO 5 (Class 100) applications.
- Lowest extractibles and particulates.
- Free from plasticizers, silicone and powders.
- Meets or exceeds all applicable requirements of IEST-RP-CC005.2.

**612HC**  
Size: S-XXL 12" Length, Ambi



**Qualatril® XC White**  
**Class 100 Nitrile Glove**

- 100% nitrile (no latex) for ISO 5 (Class 100) applications.
- Naturally anti-static – 10<sup>9</sup> ohms.
- Manufactured without plasticizers, silicone or powders.
- Consistently low particulates and extractible ion levels.
- Meets or exceeds all applicable requirements of IEST-RP-CC005.2.

**Q095**  
Size: S-XXL 9" Length, Ambi

**Q125**  
Size: S-XXL 12" Length, Ambi



**QualaSheer® XC**  
**Class 100 Vinyl Glove**

- 100% PVC co-polymer (no latex) for ISO 5 (Class 100) applications.
- Naturally anti-static – 10<sup>10</sup> ohms.
- Microtextured.
- Meets or exceeds all applicable requirements of IEST-RP-CC005.2.

**VHC12**  
Size: S-XL 12" Length, Ambi



**PolyTuff® Acid & Alkali**  
**Hypalon® Glove**

- Packaged for ISO 5 (Class 100) applications.
- Engineered for corrosive alkalis and ultra-strong acids using Hypalon®, sulfur-free.
- Flexible for long wearing comfort.
- Handling for wet or dry environments.

**41G**  
Size: Universal Large Only 14" Length  
Hand Specific



**PolyTuff® Superior Solvent**  
**Silicon Elastomer Glove**

- Packaged for ISO 5 (Class 100) applications.
- For industrial use with silicon-based adhesives and harsh solvents such as DMF, THF, cyclohexanone and ketones.
- Silicon elastomer formulation withstands flaking, puncture and abrasion.

**90G**  
Size: Universal Large Only 12" Length  
Hand Specific



**Qualatex® XC**  
**Natural Latex Fingercot**

- Packaged for ISO 5 (Class 100) applications. Compliant with ASTM and IEST-RP-CC 005.3 standards.
- Eliminates contamination risks from silicone oils, skin salts, particulates and plasticizers.
- Packaged in gas-impermeable film flushed with semiconductor grade N2.
- Unique, Stand-Up pouch – easy product identification.

**5C (Powder-Free)**  
Size: S-XXL



**PolyTuff® Solvent Series**  
**Polyurethane Glove**

- Packaged for ISO 5 (Class 100) applications.
- Protection from chlorinated solvents (MeCl and TCE), acetone, xylene, freons and IPA.
- Tough, chemical & solvent resistant - solvent process polyurethane, sulfur-free.
- Ergonomic Comfort Curve™ hand specific design.

**20G (8 mil)**  
Size: S-XL 12" Length



**PolyTuff® Static Dissipative**  
**Polyurethane Glove**

- Packaged for ISO 5 (Class 100) applications.
- Non-generative 10<sup>7</sup> ohms per square surface unit.
- Resists common solvents such as MeCl, TCE and IPA.
- ESD-safe for Class I and certain Class II devices.
- Ergonomic Comfort Curve™ hand specific design.


**25G (4 mil)**  
Size: S-XL 12" Length



**PolyTuff® Conductive**  
**Polyurethane Glove**

- Packaged for ISO 5 (Class 100) applications.
- Truly conductive 10<sup>4</sup> ohms per square surface unit.
- ESD-safe for Class 0, I and II devices.
- Tough solvent process polyurethane, sulfur-free – no carbon shedding.
- Ergonomic Comfort Curve™ hand specific design.


**27G (4 mil)**  
**28G (8 mil)**  
Size: S-XL 12" Length

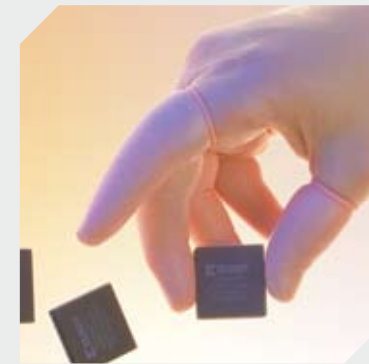

**Qualatex® XC Anti-Static**  
**Pink Latex Fingercot**

- Packaged for ISO 5 (Class 100) applications. Compliant with ASTM and IEST-RP-CC 005.3 standards.
- Average surface resistance of 5x10<sup>12</sup> ohms per square unit.
- For use with Class II static sensitive devices (thresholds above 1000V).
- Packaged in gas-impermeable film flushed with semiconductor grade N2.
- Unique, Stand-Up pouch – easy product identification.

**7C (Powder-Free)**  
Size: S-XXL

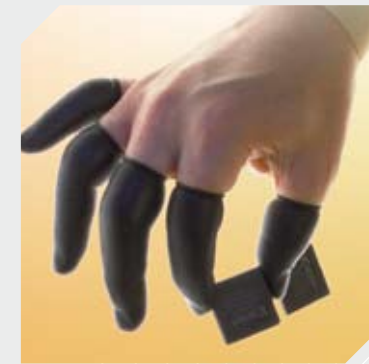

**Qualatex® XC Static Dissipative**  
**Black Latex Fingercot**

- Packaged for ISO 5 (Class 100) applications. Compliant with ASTM and IEST-RP-CC 005.3 standards.
- Average surface resistance of 10<sup>7</sup> ohms per square surface unit.
- For use with Class I and Class II static sensitive devices.
- Packaged in gas-impermeable film flushed with semiconductor grade N2.
- Unique, Stand-Up pouch – easy product identification.

**8C (Powder-Free)**  
Size: S-XXL



**Qualatril® XC Anti-Static**  
**White Nitrile Fingercot**

- Packaged for ISO 5 (Class 100) applications.
- Average surface resistance of 5x10<sup>9</sup> ohms per square unit.
- For use with Class II static sensitive devices (thresholds above 1000V).
- Packaged in gas-impermeable film flushed with semiconductor grade N2.
- Unique, Stand-Up pouch – easy product identification.

**9C (Powder-Free)**  
Size: S-XL



**Qualatherm® 1400**  
**Dry Thermal Protection**

- Packaged for ISO 5 (Class 100).
- Dry contact temperatures from 210°F to 1400°F (-134°C to 760°C) with no charring, ash or residue.
- No PCB, asbestos or fiberglass.

**50G (Forearm Protection)**

Size: M, L, XL 14" Length

**55G (Elbow Protection)**

Size: One size fits all 18" Length

**57G (Shoulder Protection)**

Size: One size fits all 27" Length



**Qualatherm® 1000**  
**Dry Thermal Protection**

- Packaged for ISO 5 (Class 100).
- Dry contact temperatures from 210°F to 1000°F (-134°C to 537°C) with no charring, ash or residue.
- No PCB, asbestos or fiberglass.

**59G (Forearm Protection)**

Size: L, XL 14" Length



**Qualatherm® 450**  
**Wet / Dry Thermal Protection**

- Packaged for ISO 5 (Class 100).
- Wet or dry contact temperatures from 78°F to 450°F (-61.4°C to 232°C).
- PolyTuff silicone elastomer is sulfur-free. Excellent resistance to chemicals, solder and fluxes.

**70G – 12" (Wrist Protection)**

Size: Hand Specific – M, L, XL

**73G – 10" (Mitt Style Hand Protection)**

Size: Ambidextrous – One size fits all

**75G – 23" (Elbow Protection)**

Size: Hand Specific – One size fits all



**Isolators**  
**Full Length Gloves**

- Standard 8" plus 6" & 10" ports; 32" length.
- Thicknesses: 15 to 30 mils.
- Hand-specific or ambidextrous.
- Beaded cuffs for added strength.
- Hand sizes: 7, 8, 9, 10.

**DBG – NR (Natural Rubber)**

**DBG – BT (Butyl) (also ESD)**

**DBG – NE (Chloroprene) (also ESD)**

**DBG – HY (Hypalon®)**

**DBG – PHY (PU-Hypalon®)**

**DBG – PU (Polyurethane)**



**Isolators**  
**Gloves/Sleeves**

- 13" glove (15 mil to 30 mil thickness) + 24" sleeve.
- Economical alternative to one piece dry box gloves – usually only glove needs to be replaced.
- Glove & sleeve can be different materials.
- Port sizes: 6", 8" 10"; gloves ambi, sizes 5-10.

**GLOVES SLEEVES**

**IG – NR SL – NR (Natural Rubber)**

**IG – BT SL – BT (Butyl) (also ESD)**

**IG – NE SL – NE (Chloroprene) (also ESD)**

**IG – HY SL – HY (Hypalon®)**

**IG – PHY SL – PHY (PU-Hypalon®)**

**IG – PU SL – PU (Polyurethane)**



**Chemical Protection**  
**Lab Gloves**

- Tops in chemical resistance.
- 13" full wrist protection.
- 7 mil to 15 mil thickness.
- Sizes: XS-XL.

**LG – NR (Natural Rubber)**

**LG – BT (Butyl)**

**LG – NE (Chloroprene)**

**LG – HY (Hypalon®)**



knit

**APPLICATIONS**

Qualakote  
LIGHTWEIGHT NYLON GLOVES

Qualaknit  
ANTI-STATIC ASSEMBLY/INSPECTION

BLUE  
CLINCHER

little  
RED  
GRIPPER





**Qualakote® NY**  
*Nylon / PU Palm Dipped*

- Comfortable seamless nylon knit.
- Micro-foamed polyurethane palm dipped.
- Breathable, knitted seamless comfort.
- Washable for economy of reuse.

PDNY (White)  
PDGNY (Gray)  
PPDBNY (Black)  
Size: S-XXXL



**Qualakote® NY**  
*Nylon / Nitrile Palm Dipped*

- Assembly-Inspection glove.
- Comfortable nylon knit.
- Micro-foamed nitrile palm dipped.
- Breathable, seamless comfort.
- Washable for economy of reuse.

NPDNY (White)  
PDBNY (Black)  
Size: XS-XXL



**Blue Clincher**  
*Poly-cotton / Latex Palm Dipped*

- Comfortable, seamless cotton/polyester knit shell.
- Crinkle latex coated palm & fingers.
- Machine washable for repeated use.
- Comfortable, seamless knit, open back.
- Excellent grip.
- Highly flexible for dexterity, ergonomic fit - less fatiguing than leather.

LPC  
Size: XS-XXL



**Little Red Gripper**  
*Nylon / Grippy Nitrile Palm*

- The ultimate in light weight breathable nylon.
- Nitrile foam coated palm & fingers.
- Seamless knit shell for maximum comfort.
- Great tactile sensitivity
- Great replacement for leather gloves.
- Machine washable for repeated use.
- Non-marking & non-linting.

GNRN  
Size: XS-XXL



**Qualakote® ESD**  
*Nylon / Carbon / PU Fingers*

- Micro-foamed polyurethane finger tip coating for excellent grip.
- Nylon + conductive carbon/nylon yarn.
- Spandex cuff – no latex.
- Maximum uncoated area, seamless knit, for breathability, comfort.
- Human Body Model ANSI/ESD SP15.1 CAFÉ resistance: 10<sup>7</sup> uncoated area; 10<sup>8-9</sup> coated area.
- Machine washable for economy of repeated use.

TDESNDY  
Size: XS-XXL



**Qualakote® ESD**  
*Nylon / PU Palm Dipped*

- Micro-foamed polyurethane palm coating for excellent grip.
- White nylon yarn for economy.
- Topical coating of glove for anti-static ESD protection.
- ANSI/ESD STM 11.11 Surface Resistance 10<sup>7-9</sup>.

PDESDEC  
Size: XS-XXL



**Qualakote® NY ESD**  
*Nylon / Carbon / PU Palm Dipped*

- Micro-foamed polyurethane palm coating for excellent grip.
- Nylon + conductive carbon/nylon yarn.
- Uncoated back, seamless knit, for breathability, comfort.
- Human Body Model ANSI/ESD SP15.1 CAFÉ resistance: 10<sup>7</sup> uncoated area; 10<sup>8-9</sup> coated area.
- Machine washable for economy of repeated use.

PDESNDY  
Size: S-XXL



**Qualaknit® ESD**  
*Nylon / Carbon Uncoated*

- Nylon + conductive carbon/nylon yarn.
- Micro-knit fingertips for maximum dexterity.
- Uncoated glove for maximum breathability, lowest resistance.
- Static dissipative HBM ANSI/ESD SP 15.1 CAFÉ resistance 10<sup>6-7</sup>.
- Seamless comfort.

KAS  
Size: XS-XXL



**Qualakote® ESD**  
*Wave Solder Glove*

- Extra thick for thermal protection.
- Nylon + conductive carbon/nylon yarn.
- Nitrile foamed palm dip for extra toughness.
- Seamless knit, open back.
- Human Body Model ANSI/ESD SP15.1 CAFÉ resistance: 10<sup>7</sup> uncoated area; 10<sup>8-9</sup> coated area.
- Machine washable for economy of repeated use.

PDWS (Low Heat)  
HWS (Medium Heat)  
Size: XS-XXL



**Qualakote® C/R**  
*Cut Resistant-All Purpose Glove*

- White Dyneema® + black nylon knit.
- Nitrile palm dipped.
- Excellent grip.
- ANSI/SEA level 2.
- EN level 3.
- Highly flexible for dexterity, ergonomic fit.
- Easy laundering, for multiple reuses.

SPPDCR  
Size: XS-XXL

# QRP's ESD PROTECTION PRODUCTS

CONDUCTIVE (<10<sup>5</sup>)    STATIC DISSIPATIVE (10<sup>5</sup> - 10<sup>7</sup>)    ANTI-STATIC (10<sup>8</sup> - 10<sup>12</sup>)

## CLEANROOM GLOVES

STYLE	DESCRIPTION	CONDUCTIVE	STATIC DISSIPATIVE	ANTI-STATIC
Q095	9" White Nitrile			~10 <sup>9</sup>
Q125	12" White Nitrile			~10 <sup>9</sup>
VHC12	12" Clear Vinyl			~10 <sup>10</sup>
25G	12" Clear Polyurethane			~10 <sup>9</sup>
27G, 28G	12" Black Polyurethane	~10 <sup>4</sup>		
DBG-NEESD	Dry Box Glove Anti-static Neoprene			~10 <sup>8</sup>

## CLEANROOM FINGERCOTS

STYLE	DESCRIPTION	CONDUCTIVE	STATIC DISSIPATIVE	ANTI-STATIC
7C	Pink Anti-static Latex			~10 <sup>12</sup>
8C	Black Static Dissipative Latex		~10 <sup>7</sup>	
9C	White Anti-static Nitrile			~10 <sup>9</sup>

## KNITTED GLOVES

STYLE	DESCRIPTION	CONDUCTIVE	STATIC DISSIPATIVE	ANTI-STATIC
KAS	Nylon Carbon Knitted Static Dissipative		~10 <sup>7</sup>	
PDESNDY	Nylon Carbon Knit/PU Palm Dipped			~10 <sup>8</sup>
TDESNDY	Nylon Carbon Knit/PU Finger Tip Dipped			~10 <sup>8</sup>
PDESDEC	White Nylon/PU Palm Dipped ESD Coated			~10 <sup>8</sup>
PDWS	Medium Weight Nylon Carbon Knit/Nitrile Palm Dip			~10 <sup>8</sup>
HWS	Heavy Weight Nylon Carbon Knit/Nitrile Palm Dip			~10 <sup>8</sup>

## GENERAL PURPOSE GLOVES

STYLE	DESCRIPTION	CONDUCTIVE	STATIC DISSIPATIVE	ANTI-STATIC
BQP09	9" 5 mil Powdered Blue Nitrile Exam Glove			~10 <sup>9</sup>
BQF09	9" 5 mil Powder Free Blue Nitrile Exam Glove			~10 <sup>9</sup>
BQF12	12" 5 mil Powder Free Blue Nitrile Exam Glove			~10 <sup>9</sup>
8BQF09	9" 8 mil Powder Free Blue Nitrile Exam Glove			~10 <sup>9</sup>
BQY09	9" 5 mil Powder Free Industrial Blue Nitrile			~10 <sup>9</sup>
SQWF09	9" 4 mil Powder Free White Nitrile Exam Glove			~10 <sup>11</sup>
SQBF09	9" 4 mil Powder Free Blue Nitrile Exam Glove			~10 <sup>11</sup>
VCYF09	9" 4 mil Powder Free Industrial Vinyl			~10 <sup>10</sup>

## GENERAL PURPOSE FINGERCOTS

STYLE	DESCRIPTION	CONDUCTIVE	STATIC DISSIPATIVE	ANTI-STATIC
7J	Pink Anti-static Latex			~10 <sup>12</sup>
8J	Black Static Dissipative Latex		~10 <sup>7</sup>	
9J	White Anti-static Nitrile			~10 <sup>9</sup>

# QRP CHEMICAL CHART

CHEMICAL NAME	Material	QRP BRAND	Latex	QVALATEX, BIOTEK	Nitrile	QVALATRILE	Vinyl	QRP VINYL	Polyurethane
Acetaldehyde									
Acetic Acid									
Acetic Anhydride									
Acetone									
Acetonitrile									
Acrylic Acid									
Ammonium Acetate									
Ammonium Carbonate									
Ammonium Fluoride, 30-70%									
Ammonium Hydroxide, 30-70%									
Ammonium Hydroxide >30%									
Amyl Alcohol									
Aniline									
Aqua Regia									
Benzaldehyde									
Benzene									
Boric Acid									
Bromopropionic Acid									
Butyl Acrylate									
Butyl Cellulosolve									
Calcium Hydroxide									
Carbon Disulfide									
Carbon Tetrachloride									
Chlorobenzene									
Chlorobromomethane									
Chloroform									
Chloronaphthalenes									
Chromic Acid									
Cisplatin									
Citric Acid, 30-70%									
Cyclohexane									
Cyclohexanol									
Cyclohexanone									
Cyclohexylamine									
Di-N-Amylamine									
Di-N-Butylamine									
Di-N-Butyl Phthalate									
Di-N-Octyl Phthalate									

CHEMICAL NAME	Material	QRP BRAND	Latex	QVALATEX, BIOTEK	Nitrile	QVALATRILE	Vinyl	QRP VINYL	Polyurethane
Hydrofluoric Acid, <50%									
Isobutyl Alcohol									
Isooctane									
Isopropyl Alcohol									
Isopropylamine									
Jet Fuel <30% Aromatics 73-248C									
Kerosene									
Lactic Acid									
Lauric Acid									
Malathion, 30-70%									
Maleic Acid									
Methanol									
Methyl Acetate									
Methyl Ethyl Ketone									
Methyl Isobutyl Ketone									
Methyl Methacrylate									
Methylene Chloride									
N-Amyl Acetate									
N-Butyl Acetate									
N-Butyl Alcohol									
N-Methyl-2-Pyrrolidone									
N-Propyl Alcohol									
Naphtha, 15-20% Aromatics									
Naphtha, <3% Aromatics									
Nitric Acid, <30%									
Nitric Acid, 30-70%									
Nitrobenzene									
Nitroethane									
1-Nitropropane									
2-Nitropropane									
Octane									
Octyl Alcohol									
Oleic Acid									
Oxalic Acid									
Palmitic Acid									
PCB (Polychlorinated Biphenyls)									
Pentachlorophenol									
Pentane									

CHEMICAL NAME	Material	QRP BRAND	Latex	QVALATEX, BIOTEK	Nitrile	QVALATRILE	Vinyl	QRP VINYL	Polyurethane
Perchloric Acid, 30-70%									
Perchloroethylene									
Peroxyacetic Acid									
Petroleum Ether, 80-110C									
Phenol, >70%									
Phosphoric Acid, >70%									
Picric Acid									
Potassium Hydroxide									
Potassium Iodide									
Propyl Acetate									
Pyridine									
Silicon Etch									
Silver Nitrate									
Sodium Carbonate									
Sodium Chloride									
Sodium Fluoride									
Sodium Hydroxide, 30-70%									
Sodium Hypochlorite									
Sodium Thiosulfate									
Styrene									
Sulfuric Acid, 30-70%									
Tannic Acid									
1,2,4,5-Tetrachlorobenzene									
1,1,1,2-Tetrachloroethane									
Tetrahydrofuran									
Toluene									
Toluene-2,4-Diisocyanate (TDI)									
1,2,4-Trichloroethane									
1,1,1-Trichloroethane									
1,1,2-Trichloroethane									
Trichloroethylene									
Tricresyl Phosphate									
Triethanolamine									
Turpentine									
Xylenes									

COLOR CODE:  
● Recommended  
● Good to Fair  
● Not Recommended

QRP has compiled the information contained herein from what we believe are authoritative sources and believe are accurate and factual as of the date printed. It is offered solely as a convenience to our customers and in intended only as a guide concerning the products mentioned. Since the users specific use applications and conditions of use are beyond QRP's control, QRP makes no warranty or representation regarding the results which may be obtained by the user. User assumes all risks and is solely responsible for the suitability and fitness of the product selected for a particular application. User should consider the benefits of double gloving in uncertain situations.

1.800.832.3882  
 QRPgloves.com