



CWP
Enabling
Customer's
Success


CW 200PLUS

Class 200°C Copper

DESCRIPTION

CW 200PLUS magnet wire is a dual film insulation system consisting of a modified polyester basecoat and a polyamideimide (AI) topcoat for continuous operation at 200°C.

It is a higher dielectric product than standard heavy NEMA 36-C film, with a .004" to .006" build.

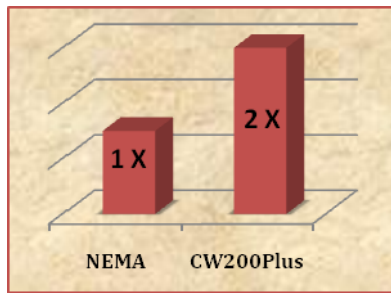

APPLICATION:

This product results in an insulation system that provides higher dielectrics than traditional heavy film coupled with excellent abrasion resistance, chemical resistance.

- AC Motors
- Generators
- DC Motors
- Hermetic Motors
- Dry Type Transformers

NEMA MW 36-C

FEATURES & BENEFITS

- Excellent dielectric properties
- 200°C continuous operating temperature
- Resilient abrasion resistant surface
- Superior chemical & moisture resistance
- Superb windability

AVAILABILITY

CW200PLUS is available in the following rectangular size ranges:

Thickness: .064" to .144"

Width: .144" to .289"

Please consult the Craig Wire service team for more detailed information.

770.562.8010



Craig Wire Products
580 Carrollton St
Temple, Georgia
30179

770-562-8010(p)
770-562-8016(f)